


TRAINING & SUPPORT: DIRECT LOAD TO TRUCK



APPLICATION SITES

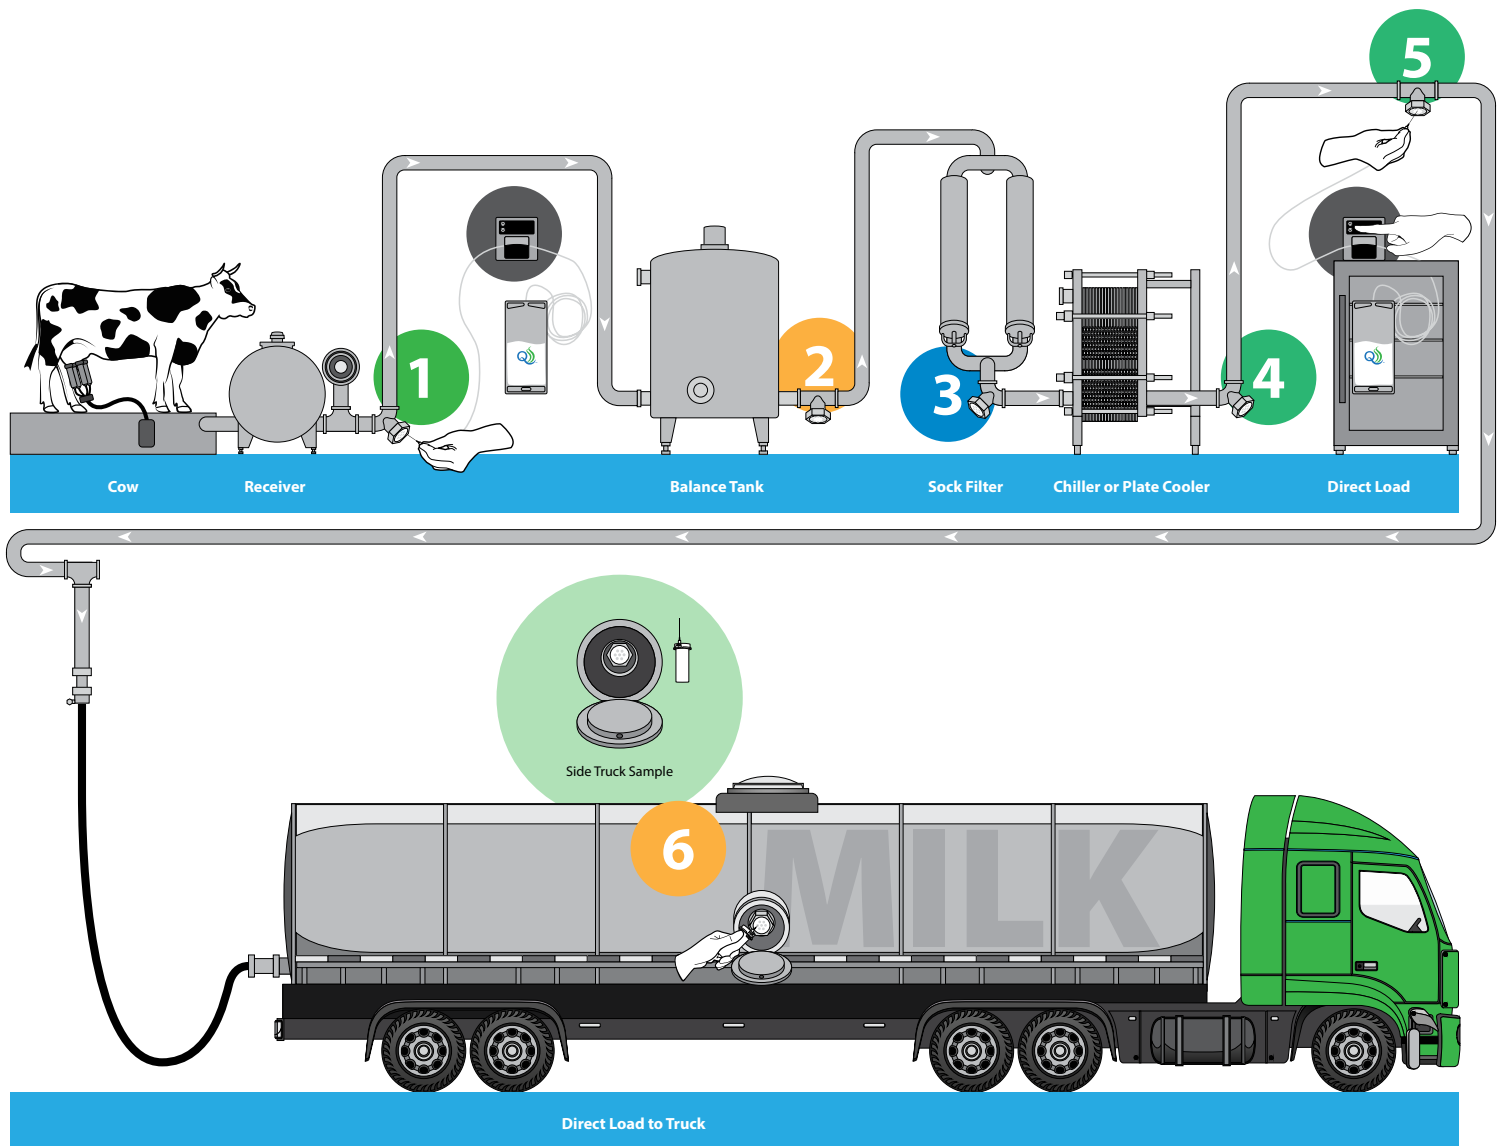


- Most critical. Consistent monitoring.
- Important. Frequent monitoring.
- Vital for troubleshooting.
- Collection bag set-up.

TRAINING & SUPPORT: DIRECT LOAD TO TRUCK



Leaders in the
science of aseptic and
representative sampling

APPLICATION SITES

- 1 Pen/ Group/ String Sampling**
Install via a QualiTru TruStream™ Sanitary Port on the “positive pressure” side of the milking system, after the parlor and before the balance tank. Can also be installed to diagnose possible system contamination from the parlor to the storage tank.
 - 2 Line Sampling**
Install via a QualiTru TruStream Sanitary Port at any point throughout your process as part of a diagnostic function, system quality check, CIP cleanliness check, and overall milk quality samples. Can be used for troubleshooting quality and cleaning issues when installed in a series.
 - 3 System Diagnostic**
Isolate your system from the parlor to the sock filters to identify key segments of your system and to verify the system CIP cycle. Can be used for troubleshooting quality and cleaning issues when installed in a series.
 - 4 Sanitation Verification**
Install a QualiTru TruStream Sanitary Port after the chiller or plate cooler. This sample will indicate whether the equipment was properly cleaned and sanitized. If contamination increases from the receiver to this sampling point, the equipment is likely soiled, or biofilms may be present at some point in the process. This sample should be collected early in the milking of each string using a TruDraw® sampling vial or equivalent.
 - 5 Direct Load**
Install a QualiTru TruStream Sanitary Port, either elbow or straight; we recommend it be installed as close to the chiller outlet as possible. This sample should be collected over the entire course of loading using a TruMotion Collection Bag and peristaltic pump. Refrigerator and peristaltic pump should be located as close to the QualiTru Sanitary Port as possible. Samples can be used for regulatory and quality.
 - 6 For Appendix N Sampling of the Milk Tanker Truck (PMO Appendix N)**
Sampling at the processing plant via the Side Sampler, providing more accurate samples and a safer physical sampling environment for certified samplers.
- **Peristaltic Pump**
The peristaltic pump is the key to a controlled sample volume of milk that is collected into the QualiTru Sterile Collection Bags. Since the sampling system is a constant flow, you get a complete representative sample of all milk that flows by, for the most dependable regulatory and quality sample available on the market today.